

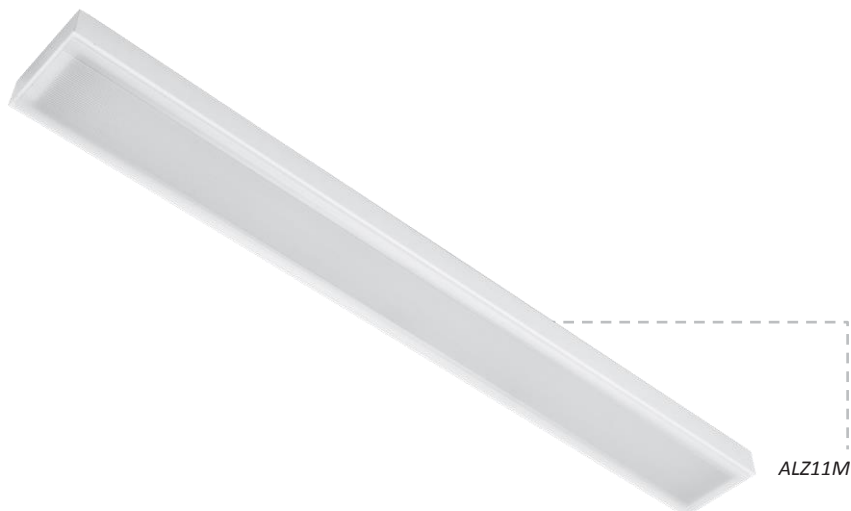


# ALZ

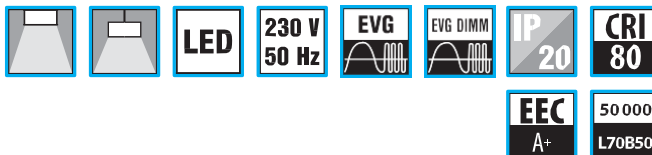

## LED Anbauleuchten

### Gehäuse:

Pulverbeschichtetes Stahlblech in Weiß (RAL 9003)

### Optik:

KO - opale Abdeckung

### LED (&):

Mid Power LED

3... warmweiß 3000K

4... neutralweiß 4000K

### Verschaltung:

LED Konstantstromtreiber

ND - nicht dimmbar (Standard)

DIM - analog dimmbar 1-10V

DALI - digital dimmbar DALI

### Installation:

Deckeninstallation

Pendelinstallation

### Zubehör:

Seilabhängung

## LED fittings with cover

### Body:

White painted (RAL9003) metal sheet

### Optic:

KO - opal cover

### LED (&):

Mid Power LED

3... warm white 3000K

4... neutral white 4000K

### Wiring:

LED driver (constant current)

ND - not dimmable (standard)

DIM - analogue dimmable 1-10V

DALI - digital dimmable DALI

### Installation:

Surface installation

Pendant installation

### Accessories:

Cord suspension

	W	lm	lm/W	A	B	C	X	Y
ALZ11MKO&V1/700	36	2800	78	1210	140	55	850	90
ALZ11MKO&V1/1050	58	3900	67					
ALZ11LKO&V1/1050	38	3100	82	1510	140	55	1150	90
ALZ11LKO&V1/1400	55	4000	73					

&-3=3000K, 4=4000K

lm - Lumen / luminaire light output

