
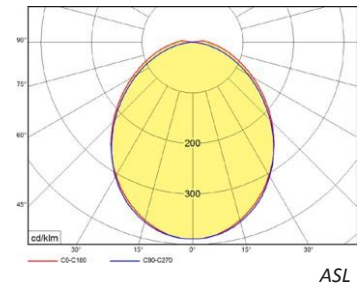
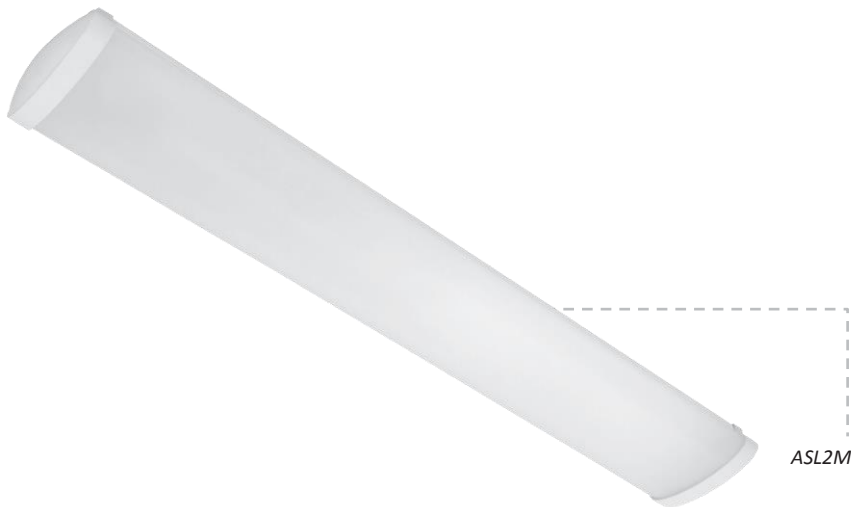


ASL, ASA

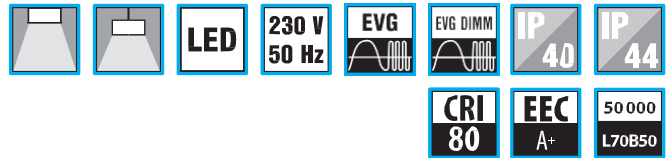

LED Anbauleuchten

- Gehäuse:**
Pulverbeschichtetes Stahlblech in Weiß (RAL 9016)
- Optik:**
KS - opale PMMA Abdeckung
- LED (&):**
Mid Power LED Konstantstromtreiber
3... 3000K
4... 4000K
- Verschaltung:**
ND - nicht dimmbar (Standard)
DIM - dimmbar 1-10V
DALI - dimmbar DALI
- Anwendung:**
Decken- oder Pendelinstallation
- Zubehör:**
Rohrabhängung
Seilabhängung
Schutzgitter
- Varianten:**
ASL - IP Schutzklasse IP40
ASA - IP Schutzklasse IP44

LED fittings with cover

- Body:**
White painted (RAL 9016) metal sheet
- Optic:**
KS - PMMA cover opal
- LED (&):**
Mid Power LED driver (constant current)
3... 3000K
4... 4000K
- Wiring:**
ND - not dimmable (standard)
DIM - dimmable 1-10V
DALI - dimmable DALI
- Application:**
Surface or pendant installation
- Accessories:**
Tube suspension
Cord suspension
Protection grid
- Variants:**
ASL - IP protection IP40
ASA - IP protection IP44

ENDKAPPE / END CAP

ENTFERNEN DER ABDECKUNG / COVER REMOVAL


ASA IP44 GEHÄUSE / ASA IP44 BODY

ASA - TREIBER MIT LED MODULEN / ASA - DRIVER WITH LED MODULES



Codes: ASL2MKS3V1/1400ND

ASL	2	M	KS	3	V1	/1400ND
Leuchtentyp / luminaire type	Anzahl Leuchtstreifen / no. of light strips	Gehäuselänge / body length: M = 1200 mm L = 1500 mm	Abdeckung / cover type KS = opal / opal	Farbtemperatur / color temperature: 3 = 3000K 4 = 4000K	Verbaute LEDs / used LEDs	Treibertyp / driver type: ND - nicht dimmbar / not dimmable DIM - dimmbar 1-10V / dimmable 1-10V DALI - dimmbar DALI / dimmable DALI

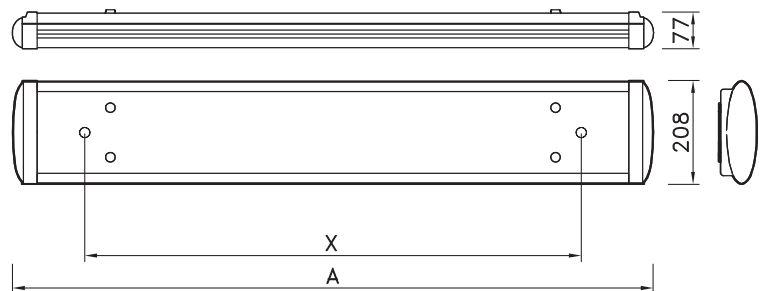

	W	lm	lm/W	A	B	C	X	Y
ASL2MKS&V1/1400	42	4000	95	1293	208	77	800	0
ASL2LKS&V1/2100	62	6000	97	1593			1000	

&-3=3000K,4=4000K Im - Lumen / luminaire light output