


LUXAL

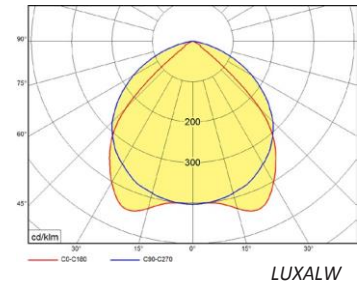

LUXALW

## LEDHallenstrahler

### Gehäuse:

Pulverbeschichtetes Stahlblech in Weiß (RAL 9003)

### Optik:

Hochglanzpolierte Aluminiumreflektoren

LUXAL... schmaler Abstrahlwinkel

LUXAL W... breiter Abstrahlwinkel

Glasklare Abdeckung

PC - Abdeckung aus Polycarbonat

KO - Opalglasabdeckung

### LED

Mid Power LED

3... warmweiß 3000K

4... neutralweiß 4000K

5... tageslichtweiß 5700K

### Verschaltung:

LED Konstantstromtreiber

ND - nicht dimmbar (Standard)

DIM - dimmbar 1-10V DC

DALI - dimmbar DALI

### Montage:

Pendelinstallation

Die Leuchten werden mit 4 Karabinerhaken zur einfachen Abhängung durch Ketten oder Seilen geliefert.

Die Leuchten werden mit einem Kabel und IP65 Verbinder ausgeliefert.

IK08 - optionale Version mit höherer Schlagfestigkeit IK08

## LEDhigh-bays

### Body:

White painted (RAL9003) metal sheet

### Optic:

High polished aluminum reflectors

LUXAL... narrow beam

LUXAL W... wide beam

Clear glass cover

PC - polycarbonate cover

KO - opal glass cover

### LED

Mid Power LED

3... warm white 3000K

4... neutral white 4000K

5... daylight 5700K

### Wiring:

Constant current LED driver

ND - not dimmable (standard)

DIM - dimmable 1-10V DC

DALI - dimmable DALI

### Assembly:

Pendant installation

Fixtures are equipped with 4 snap hooks for easy hanging by chains or ropes.


The fittings are equipped with cable with IP65 connector.

IK08 - optional version with higher resistance IK08

HAUPTVERBINDER / MAINS CONNECTOR



TREIBER / DRIVER



KARABINERHAKEN / SNAP HOOK



LED MODULE / LED MODULES



Codes: LUXAL2M4V1/2100ND


LUXAL	2	M	4	V1	/2100ND
Leuchtentyp / luminaire type LUXAL - schmaler Abstrahlw. / narrow beam LUXALW - breiter Abstrahlw. / wide beam					
Anzahl Leuchtstreifen / no. of light strips					
Gehäuselänge / body length: S = 600 mm M = 1200 mm					
Farbtemperatur / color temperature: 3 = 3000K 4 = 4000K 5 = 5700K					
Abdeckung / cover type: Glasklar / clear glass KO - Opalglas / opal glass PC - PC klar / clear polycarbonate					
Verbaute LEDs / used LEDs					
Treibertyp / driver type: ND - nicht dimmbar / not dimmable DIM - dimmbar 1-10V / dimmable 1-10V DALI - dimmbar DALI / dimmable DALI					



LUXAL2M



LUXAL4M

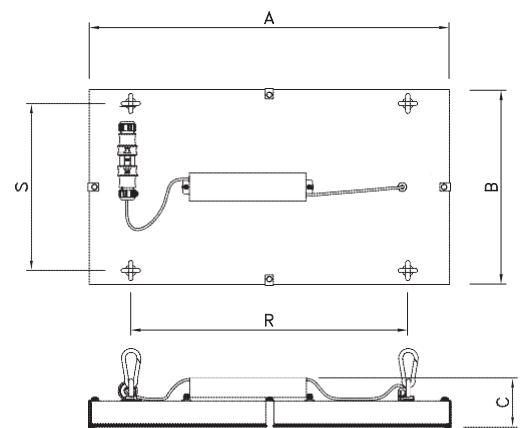

	W	lm	lm/W	A	B	C	R	S
LUXAL4S& 2100	108	11500	106	655	350	90	500	300
LUXAL2M& 2100	108	11500	106	1220	190		940	140
LUXAL4M& 4200	220	24500	111	1220	350		940	300
LUXALW4S& 2100	108	13000	120	655	350	90	500	300
LUXALW2M& 2100	108	13000	120	1220	190		940	140
LUXALW2M& 1400	70	9800	140	1220	190		940	140
LUXALW4M& 4200	220	26000	118	1220	350		940	300
LUXALW4M& 2800	140	20000	143	1220	350		940	300

&-3=3000K,4=4000K,5=5700K

lm - Lumen / luminaire light output