
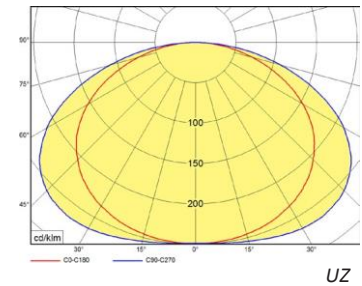


UZ

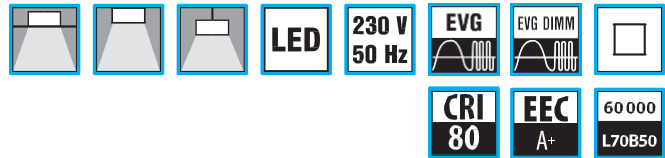

LED Panel

Gehäuse:

Weiß lackierter (RAL 9003) Aluminiumrahmen

Optik:

Lichtleitende Acrylscheibe

LED (&):

Mid Power LED

3... warmweiß 3000K

4... neutralweiß 4000K

5... tageslichtweiß 5700K

Verschaltung:

LED Konstantstromtreiber

ND - nicht dimmbar (Standard)

DIM - dimmbar 1-10V DC

DALI - dimmbar DALI

Version (Gehäuseform)

UZ... A600 - Quadrat für Rastermaß 600mmx600mm

UZ... A625 - Quadrat für Rastermaß 625mmx625mm

Arten der Installation:

Einlegevariante für eine modulare Decke 600mm oder 625mm

Aufbauvariante mit Montagerahmen UZRAM

Zubehör:

UZRAM600 - Rahmen zur Deckenanbaumontage von 3L UZ

Panel, Modul 600

UZRAM625 - Rahmen zur Deckenanbaumontage von 3L UZ

Panel, Modul 625

LED panel

Body:

White painted (RAL 9003) aluminum frame

Optic:

Translucent acrylic desk

LED (&):

Mid Power LED

3... warm white 3000K

4... neutral white 4000K

5... daylight 5700K

Wiring:

LED current driver

ND - not dimmable (standard)

DIM - dimmable 1-10V DC

DALI - dimmable DALI

Version (body shape)

UZ... A600 - square for raster 600mmx600mm

UZ... A625 - square for raster 625mmx625mm

Installation way:

Recessed installation for modular ceiling 600mm or 625mm

Surface installation using a mounting frame UZRAM

Accessories:

UZRAM600 - Frame for surface installation 3L UZ, module 600


UZRAM625 - Frame for surface installation 3L UZ, module 625

UZ PROFIL / UZ PROFILE

VERBINDER / CONNECTOR



UZ+UZRAM

UZ+UZRAM

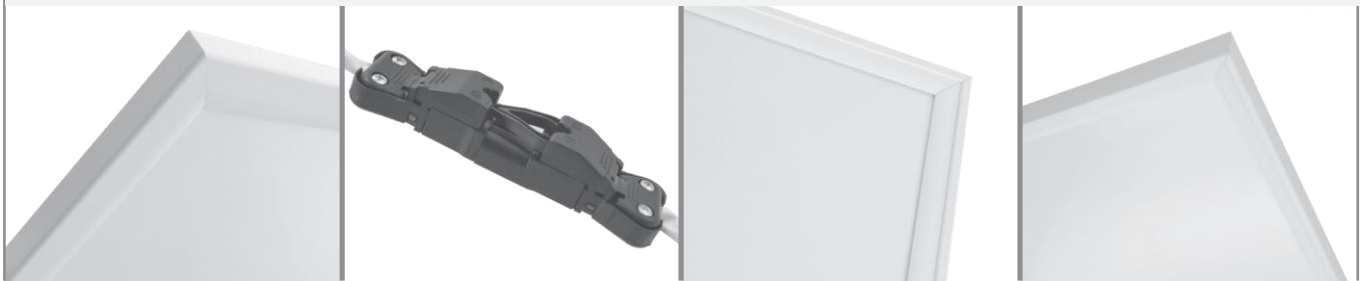

Codes: UZ4A600/700ND

| | | | | |
|------------------------------|--|--------------------------|-------------------------------|---|
| UZ | 4 | A | 600 | /700ND |
| Leuchtentyp / luminaire type | Farbtemperatur / color temperature: 3 = 3000K 4 = 4000K 5 = 5700K | Gehäuseform / body shape | Modul / module: 600 625 | Treibertyp / driver type: ND - nicht dimmbar / not dimmable DIM - dimmbar 1-10V / dimmable 1-10V DALI - dimmbar DALI / dimmable DALI |

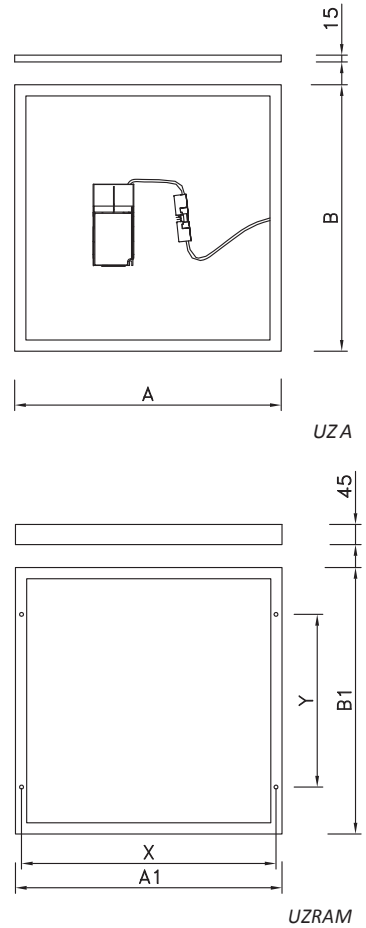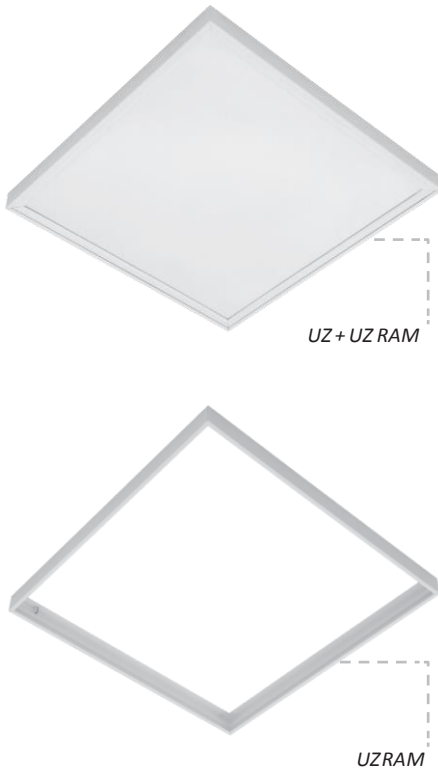

| | A1 | B1 | X | Y |
|----------|-----|-----|-----|-----|
| UZRAM600 | 602 | 602 | 582 | 450 |
| UZRAM625 | 627 | 627 | 607 | 450 |

| | W | lm | lm/W | 600 | | 625 | | kg |
|------------|----|------|------|-----|-----|-----|-----|-----|
| | | | | A | B | A | B | |
| UZ&A /700 | 33 | 3700 | 112 | 596 | 596 | 622 | 622 | 4,2 |
| UZ&A /1050 | 56 | 5800 | 104 | | | | | |

& - 3 = 3000K, 4 = 4000K, 5 = 5700K

lm - Lumen / luminaire light output